

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
6 January 2005 (06.01.2005)

PCT

(10) International Publication Number  
**WO 2005/001314 A1**

(51) International Patent Classification<sup>7</sup>: **F16H 59/10 // B60K 20/04** (74) Agent: ALBIHNS GÖTEBORG AB; Box 142, S-401 22 Göteborg (SE).

(21) International Application Number:  
PCT/SE2004/000446

(22) International Filing Date: 24 March 2004 (24.03.2004)

(25) Filing Language: Swedish

(26) Publication Language: English

(30) Priority Data:  
0301892-6 27 June 2003 (27.06.2003) SE

(71) Applicant (for all designated States except US): **KONGBERG AUTOMOTIVE AB** [SE/SE]; Box 504, S-565 28 Mullsjö (SE).

(72) Inventors; and


(75) Inventors/Applicants (for US only): **HERMANSSON, Bengt** [SE/SE]; Oxelgatan 8, S-565 33 Mullsjö (SE). **DANKBAAR, Frank** [NL/SE]; Västra Storgatan 33 B, S-553 15 Jönköping (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: DEVICE FOR SYMMETRICAL GEAR SHIFT

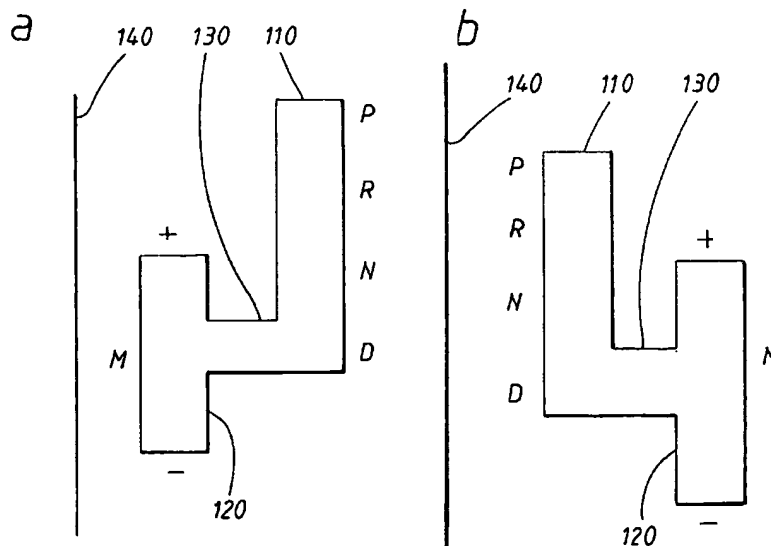

(57) Abstract: The invention relates to an arrangement for controlling gear positions in a car, comprising a console, having a wall (140), and one or more sensors (A, B) arranged in connection to said wall, and further comprising a gear lever (210) and a code device (220, 230, 240) which can interact with the said sensors (A, B), in which the code device (220, 230, 240) is connected to the gear lever (210) so that the code device is actuated to move upon motion of the gear lever. The code device (230) is pivotably secured adjacent to the gear lever (210) and the arrangement further comprises means (240) for biasing the code device (230) in the direction of the said console wall (140). Expeditiously, the arrangement further comprises an arm (220) by which the code device (230) is pivotably secured in the gear lever (210).

WO 2005/001314 A1



**Declaration under Rule 4.17:**

— *of inventorship (Rule 4.17(iv)) for US only*

**Published:**

— *with international search report*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*